




Pneumatic Tools/Machinery

Extensive range of pneumatic tools:

- ✓ Impact Wrenches 10 3/8 12^S 1/2 20 3/4 25 1"
- ✓ Air Ratchets 6.3 1/4 10 3/8 12^S 1/2 6.3 1/4
- ✓ Drill, Angle Drill
- ✓ Die Grinders, straight and angled
- ✓ Chisel Hammer Set
- ✓ Orbital Sander, Belt Sander, Angle Grinder
- ✓ Sabre Saw
- ✓ Needle Scaler
- ✓ Air Nibbler, Air Shear
- ✓ Tire Inflator
- ✓ Grease Gun
- ✓ Combination Spray Gun
- ✓ Blind Rivet Gun
- ✓ Air Blow Guns, Air Blow Pens
- ✓ Hot Air Tools
- ✓ Cordless Impact Wrench Set and many more ...

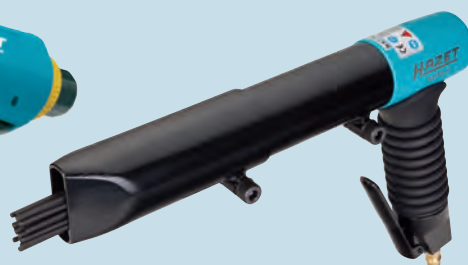

HAZET is permanently investigating into the reduction of the power requirement of machines in order to reduce the environmental impact. The air consumption e.g. of our pneumatics tools is constantly optimized – naturally with continuous efficiency and output power!

Impact Wrench



- Working pressure: 6.3 bar
- Cold-insulated handle
- Coupler plug, nominal size 7.2 included
- Exhaust air is guided through the handle downwards
- Reduced vibrations
- Multiple power settings in forward and reverse
- Easy handling
- **Ultra-light (1.3 kg) magnesium housing** lighter than comparable aluminium housings
- **Powerful pin clutch mechanism**
- **Max. loosening torque: 350 Nm**
- Recommended torque: up to 190 Nm
- Best possible distribution of weight for ergonomic working
- Screw size: M 13
- Air consumption: 71 l/min
- Air inlet thread: 6.3 mm (1/4")
- Sound pressure level: Lp A 97 dB(A)

HAZET No.	Nm max.	ΔL g	1/min	EAN-No. 4000896+
9011 MG	311	1340	11000	109180

Impact Wrench



- Working pressure: 6.3 bar
- Cold-insulated handle
- Coupler plug, nominal size 7.2 included
- Exhaust air is guided through the handle downwards
- Reduced vibrations
- Multiple power settings in forward and reverse
- Easy handling
- **With one-hand reversing switch** (right/left)
- **Powerful twin hammer mechanism**
- **Max. loosening torque: 1700 Nm**
- Recommended torque: 861 Nm
- Screw size: M 16
- Air consumption: 144 l/min
- Air inlet thread: 6.3 mm (1/4")
- Sound pressure level: Lp A 96 dB(A)
- Recommended hose diameter: 10 mm



HAZET No.	Nm max.	ΔL g	1/min	EAN-No. 4000896+
9012 EL	1054	2000	7800	161782



- Working pressure: 6.3 bar
- Cold-insulated handle
- Coupler plug, nominal size 7.2 included
- Exhaust air is guided through the handle downwards
- Reduced vibrations
- Multiple power settings in forward and reverse
- Easy handling
- **Light (2.5 kg) magnesium housing** lighter than comparable aluminium housings
- **Powerful twin hammer mechanism**
- **Max. loosening torque: 1500 Nm**
- Recommended torque: up to 542 Nm
- Screw size: M 16
- Air consumption: 133 l/min
- Air inlet thread: 6.3 mm (1/4")
- Sound pressure level: Lp A 94.8 dB(A)

HAZET No.	Nm max.	ΔL g	1/min	EAN-No. 4000896+
9012 MG	750	2530	7500	109197



- Working pressure: 6.3 bar
- Cold-insulated handle
- Coupler plug, nominal size 7.2 included
- Exhaust air is guided through the handle downwards
- Reduced vibrations
- Multiple power settings in forward and reverse
- Easy handling
- **Ultra-light plastic housing – maximum performance at minimum weight (1.9 kg)**
- Shock-resistant plastic housing
- **Powerful twin hammer mechanism**
- **Max. loosening torque: 1490 Nm**
- Recommended torque: up to 515 Nm
- Screw size: M 16
- Air consumption: 133 l/min
- Air inlet thread: 6.3 mm (1/4")
- Sound pressure level: Lp A 98.5 dB(A)

HAZET No.	Nm max.	ΔL g	1/min	EAN-No. 4000896+
9012 KS	690	2300	7700	109203



Impact Wrench



- Working pressure: 6.3 bar
- Cold-insulated handle
- Coupler plug, nominal size 7.2 included
- Exhaust air is guided through the handle downwards
- Reduced vibrations
- Multiple power settings in forward and reverse
- Easy handling
- **Ultra-light plastic housing – lighter than comparable aluminium housings**
- **Maximum performance with minimum weight (only 1.21 kg)**
- **Minimal vibrations protecting muscles and joints especially at frequent use**
- **Up to 10 dB(A) more silent than standard models**
- **Powerful twin hammer mechanism**
- **Max. loosening torque: 493 Nm**
- Recommended torque: 448 Nm
- Shock-resistant plastic housing
- Screw size: M 16
- Air consumption: 133 l/min
- Air inlet thread: 6.3 mm (1/4")
- Sound pressure level: Lp A 90 dB(A)

HAZET No.	Nm max.	g	1/min	EAN-No. 4000896+
9012 UL	461	1250	9500	146970

Impact Wrench



- Working pressure: 6.3 bar
- Cold-insulated handle
- Coupler plug, nominal size 7.2 included
- Exhaust air is guided through the handle downwards
- Reduced vibrations
- Multiple power settings in forward and reverse (9012-90 single-stage)

Impact Wrench

- Easy handling
- For the professional wheel mounting and dismantling on motor vehicles
- Ultra-light, shock-resistant plastic housing – maximum performance with minimum weight
- Powerful twin hammer mechanism
- Max. loosening torque: 800 Nm
- **Tightening torque limited: 90 Nm**
- Air consumption: 133 l/min
- Air inlet thread: 6.3 mm (1/4")

HAZET No.	Nm max.	g	EAN-No. 4000896+
9012-90	90	2215	164882



- Working pressure: 6.3 bar
- Cold-insulated handle
- Coupler plug, nominal size 7.2 included
- Exhaust air is guided through the handle downwards
- Reduced vibrations
- Multiple power settings in forward and reverse
- Easy handling
- **Powerful pin clutch mechanism**
- **Max. loosening torque: 1000 Nm**
- Recommended torque: 550 Nm
- Screw size: M 16
- Air consumption: 113 l/min
- Air inlet thread: 6.3 mm (1/4")
- Sound pressure level: Lp A 88 dB (A)

HAZET No.	Nm max.	g	1/min	EAN-No. 4000896+
9012 SPC	610	2994	7000	119639



- Working pressure: 6.3 bar
- Cold-insulated handle
- Coupler plug, nominal size 7.2 included
- Exhaust air is guided through the handle downwards
- Reduced vibrations
- Multiple power settings in forward and reverse
- Easy handling
- **Powerful twin hammer mechanism**
- **Max. loosening torque: 1000 Nm**
- Recommended torque: 550 Nm
- Air consumption: 127 l/min
- Sound pressure level: Lp A 94.4 dB(A)
- Air inlet thread: 6.3 mm (1/4")
- Screw size: M 16

HAZET No.	Nm max.	g	1/min	EAN-No. 4000896+
9012-1 SPC	685	2540	7500	146963

Impact Wrench



- Working pressure: 6.3 bar
- Cold-insulated handle
- Coupler plug, nominal size 7.2 included
- Exhaust air is guided through the handle downwards
- Reduced vibrations
- Multiple power settings in forward and reverse
- Easy handling
- **Light (5.16 kg) magnesium housing** lighter than comparable aluminium housings
- **Powerful twin hammer mechanism**
- **Max. loosening torque: 1800 Nm**
- Recommended torque: up to 1084 Nm
- Screw size: M 30
- Air consumption: 198 l/min
- Air inlet thread: 10 mm (3/8")
- Sound pressure level: Lp A 96.8 dB(A)




HAZET No.	Nm max.	Δg	1/min	EAN-No. 4000896+
9013 MG	1627	5160	6100	109210

Impact Wrench



- Working pressure: 6.3 bar
- Cold-insulated handle
- Coupler plug, nominal size 7.2 included
- Exhaust air is guided through the handle downwards
- Reduced vibrations
- Multiple power settings in forward and reverse
- Easy handling
- **Light (8.5 kg) magnesium housing** lighter than comparable aluminium housings
- **Powerful twin hammer mechanism**
- **Max. loosening torque: 2600 Nm**
- Recommended torque: up to 1355 Nm
- Screw size: M 32
- Air consumption: 269 l/min
- Air inlet thread: 12.5 mm (1/2")
- Sound pressure level: Lp A 111.2 dB(A)

HAZET No.	Nm max.	Δg	1/min	EAN-No. 4000896+
9014 MG	2303	8500	4500	109227

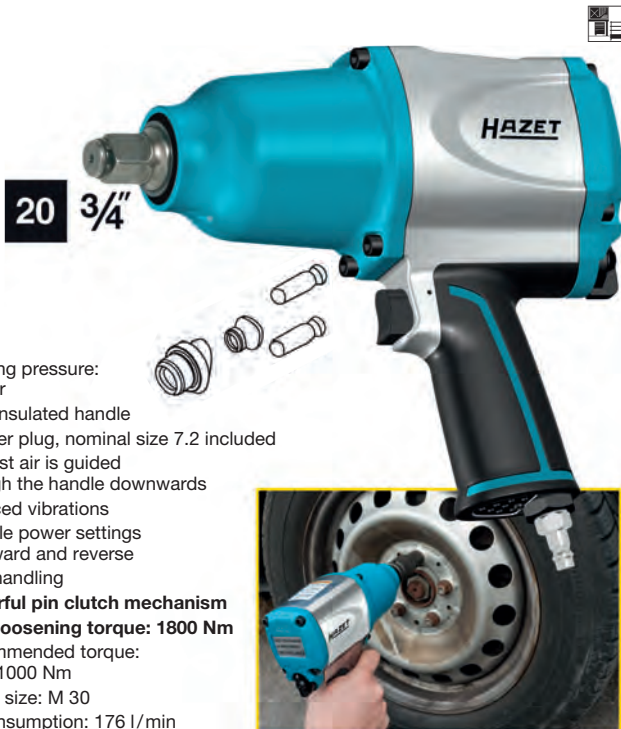

- Working pressure: 6.3 bar
- Cold-insulated handle
- Coupler plug, nominal size 7.2 included
- Exhaust air is guided through the handle downwards
- Reduced vibrations
- Multiple power settings in forward and reverse
- Easy handling
- **Powerful pin clutch mechanism**
- **Max. loosening torque: 1800 Nm**
- Recommended torque: up to 1000 Nm
- Screw size: M 30
- Air consumption: 176 l/min
- Air inlet thread: 10 mm (3/8")
- Sound pressure level: Lp A 103.1 dB(A)



HAZET No.	Nm max.	Δg	1/min	EAN-No. 4000896+
9013 SPC	1490	5400	3800	153473



- Working pressure: 6.3 bar
- Cold-insulated handle
- Coupler plug, nominal size 7.2 included
- Exhaust air is guided through the handle downwards
- Reduced vibrations
- Multiple power settings in forward and reverse
- Easy handling
- **Light (8.8 kg) magnesium housing** lighter than comparable aluminium housings
- **Powerful twin hammer mechanism**
- **Max. loosening torque: 2600 Nm**
- Recommended torque: up to 1355 Nm
- Screw size: M 32
- Air consumption: 300 l/min
- Air inlet thread: 12.5 mm (1/2")
- Sound pressure level: Lp A 111.4 dB(A)

HAZET No.	Nm max.	Δg	1/min	EAN-No. 4000896+
9014 MG-Lg	2160	10.9	4500	115853



Air Ratchet



6.3 1/4"

- Forward and reverse
- Continuous regulation
- Air inlet thread: 6.3 mm (1/4")
- Working pressure: 6.3 bar
- Cold-insulated handle
- Reduced vibrations
- Coupler plug, nominal size 7.2 included
- Air consumption: 180 l/min
- Sound pressure level: Lp A 83 dB(A)

HAZET No.	Nm max.	⌀ g	l mm	1/min	EAN-No. 4000896+
9020-2	35	750	165	170	109432



10 3/8"

- Forward and reverse
- Continuous regulation
- Air inlet thread: 6.3 mm (1/4")
- Working pressure: 6.3 bar
- Cold-insulated handle
- Reduced vibrations
- Coupler plug, nominal size 7.2 included
- Air consumption: 180 l/min
- Sound pressure level: Lp A 88 dB(A)

HAZET No.	Nm max.	⌀ g	l mm	1/min	EAN-No. 4000896+
9021-2	70	1403	230	160	109449



10 3/8"

- Forward and reverse
- Continuous regulation
- Air inlet thread: 6.3 mm (1/4")
- Working pressure: 6.3 bar
- Cold-insulated handle
- Reduced vibrations
- Coupler plug, nominal size 7.2 included
- **Short design** (same dimensions as 9020-2)
- Air consumption: 180 l/min
- Sound pressure level: Lp A 83 dB(A)

HAZET No.	Nm max.	⌀ g	l mm	1/min	EAN-No. 4000896+
9021-3	35	741	165	170	116614


Air Ratchet for Bits



- Forward and reverse
- Continuous regulation
- Air inlet thread: 6.3 mm (1/4")
- Working pressure: 6.3 bar
- Cold-insulated handle
- Reduced vibrations
- Coupler plug, nominal size 7.2 included
- **Low height for working areas with restricted access**
- Double function: Ⓢ* bit holder suitable for standard screwdriver bits with Ⓢ* hexagon (bits are not included in delivery)
- Ⓢ* ratchet
- Air consumption: 81 l/min
- Sound pressure level: Lp A 88 dB(A)

HAZET No.	Nm max.	⌀ g	l mm	1/min	EAN-No. 4000896+
9021-4	47	603	165	200	143788

Air Ratchet

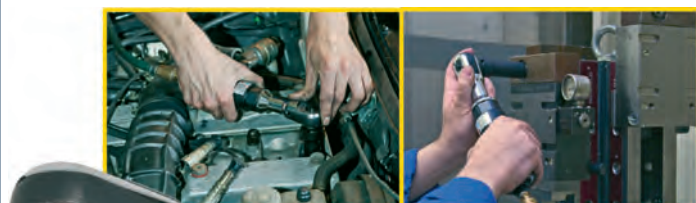

12.5 1/2"

- Forward and reverse
- Continuous regulation
- Air inlet thread: 6.3 mm (1/4")
- Working pressure: 6.3 bar
- Cold-insulated handle
- Reduced vibrations
- Coupler plug, nominal size 7.2 included
- Air consumption: 180 l/min
- Sound pressure level: Lp A 88 dB(A)

HAZET No.	Nm max.	⌀ g	l mm	1/min	EAN-No. 4000896+
9022-2	70	1490	230	160	109456

Air Ratchet



- Forward and reverse
- Continuous regulation
- Air inlet thread: 6.3 mm (1/4")
- Working pressure: 6.3 bar
- Cold-insulated handle
- Reduced vibrations
- Coupler plug, nominal size 7.2 included
- Air consumption: 180 l/min
- Sound pressure level: Lp A 89 dB(A)

HAZET No.	Nm max.	⌀ g	l mm	1/min	EAN-No. 4000896+
9022-3	110	1490	270	160	140701

High Quality Air Ratchet



- Sturdy workshop construction – especially suitable for continuous operation in industrial production processes**
- **Extra-strong head** made of especially heat-treated special steel
 - Sturdy ratchet head suitable for **high permanent stress** (series production and the like)
 - **Long service-life** and high power rating of the device (long service-life = long operational availability)
 - **Cold insulated handle** enables comfortable grip for continuous operation
 - Working pressure: 6.3 bar
 - Coupler plug, nominal size 7.2 mm included
 - Air consumption: 77 l/min
 - Air inlet thread: 6.3 mm (1/4")

HAZET No.	l mm	Nm max.	⌀ g	1/min	EAN-No. 4000896+
9021 P-1	330	95	1380	160	172252

9022 P-1	330	95	1390	160	172269
----------	-----	----	------	-----	--------

Impact Air Ratchet



- Reaction-free pneumatic impact ratchet for loosening and tightening screw connections in areas with restricted access**
- **Reaction-free**
 - **High torque values – approx. 30% above standard products**
 - **Speed level – approx. 3 x higher than standard products**
 - **Non-rebound mechanism** for low impact work
 - **Suitable for hand retightening with torque values > 270 Nm** (competitive product with only approx. 250 Nm)
 - With powerful pin clutch mechanism
 - Working pressure: 6.3 bar
 - Acceleration of vibration: 4.53 m/s²
 - Coupler plug, nominal size 7.2 mm included
 - Air consumption: 113 l/min
 - Air inlet thread: 6.3 mm (1/4")
 - Sound pressure level: Lp A 91 dB(A)
 - Sound power level: Lp W 98 dB (A)
 - Recommended hose diameter: 10 mm

HAZET No.	l mm	Nm max.	⌀ g	1/min	EAN-No. 4000896+
9022 SR-1	280	102	1280	400	170593

Air Ratchet, long style



12.5 1/2



- Especially for commercial vehicles**
- Extra long style – extremely sturdy
 - Solid and sturdy ratchet head for heavy use 122 Nm
 - Suitable for manual retightening with torque values > 270 Nm (Competition only > 250 Nm)
 - For loosening and tightening firm screw connections
 - The particularly long handle enables optimal control of the torque and good handling of the higher capacity.
 - Working pressure: 6.3 bar
 - Acceleration of vibration: 3.7 m/s²
 - Coupler plug, nominal size 7.2 mm included
 - Air consumption: 142 l
 - Air inlet thread: 6.3 mm (1/4")
 - Sound pressure level: Lp A 90 dB(A)
 - Sound power level: Lp W 102 dB (A)
 - Recommended hose diameter: 10 mm

HAZET No.	l mm	Nm max.	⌀ g	1/min	EAN-No. 4000896+
9022 Lg-1	365	122	2000	150	170609



Air Drill



Especially appropriate for car body works and industry

- Quick-change chuck, capacity 1–10 mm
- Forward and reverse
- Air consumption: 113 l/min
- Air inlet thread: 6.3 mm (1/4")
- Working pressure: 6.3 bar
- Sound pressure level: Lp A 91 dB(A)
- Cold-insulated handle
- Exhaust air is guided through the handle downwards
- Robust housing
- Suitable for continuous operation
- Coupler plug, nominal size 7.2 included

HAZET No.	g	l mm	1/min	EAN-No. 4000896+
9030-1	1258	170	2600	109470

Angle Drill



For working in areas with difficult access

- Quick change chuck, capacity 1–10 mm
- Forward and reverse
- Exhaust air is guided through the handle backwards
- Air consumption: 113 l/min
- Air inlet thread: 6.3 mm (1/4")
- Working pressure: 6.3 bar
- Sound pressure level: Lp A 95 dB(A)
- Coupler plug, nominal size 7.2 included

HAZET No.	g	l mm	1/min	EAN-No. 4000896+
9030-5	1369	240	1200	132379

Die Grinder, straight design



For grinding, polishing, burnishing and deburring

- **Straight design**
- Speed regulation with setting wheel
- Collet chuck: 6 mm
- High ease of use
- Ergonomic design
- Power: 164 Watts
- Air consumption: 113 l/min
- Air inlet thread: 6.3 mm (1/4")
- Working pressure: 6.3 bar
- Sound pressure level: Lp A 91 dB(A)
- Coupler plug, nominal size 7.2 included

HAZET No.	g	l mm	1/min	EAN-No. 4000896+
9032-1	635	158	2000–25000	117055

Angle Die Grinder



For grinding, polishing, burnishing and deburring

- **Angled design**
- Speed regulation with setting wheel
- Collet chuck: 6 mm
- High ease of use
- Ergonomic design
- Power: 160 Watts
- Air consumption: 113 l/min
- Air inlet thread: 6.3 mm (1/4")
- Working pressure: 6.3 bar
- Sound pressure level: Lp A 90 dB(A)
- Coupler plug, nominal size 7.2 included

HAZET No.	g	l mm	1/min	EAN-No. 4000896+
9032-5	773	160	2000–22000	117062

Orbital Sander



With dust collector

- Suction hose (2.0 m) and dust collector included
- Continuous speed regulation
- Stroke: 5 mm
- Low height and light composite housing
- Grinding disc with 15 bore holes, Ø 150 mm with hook and loop fastener
- Anti-slip handle
- Air consumption: 56 l/min
- Air inlet thread: 6.3 mm (1/4")
- Working pressure: 6.3 bar
- Sound pressure level: Lp A 88.8 dB (A)
- Max. 12000 1/min
- Coupler plug, nominal size 7.2 included

HAZET No.	g	1/min	EAN-No. 4000896+
9033-2	1850	12000	156337

Suction hose for Orbital Sander 9033-1 -2

- Suction hose 6 m long
- With tool holder on both ends for Orbital Sander 9033-1 and -2
- Plastic

9033-01	1005	-	145614
---------	------	---	--------

Grinding disc with 15 holes

- for Orbital Sander 9033-2
- Medium hard with fiber-reinforced rear side
- With hook and loop fastener
- Ø 150 mm with 5/16" threaded mount

9033-020	170	-	156351
----------	-----	---	--------

Abrasive pads

- for Orbital Sander 9033-1 and -2
- With 6 holes.
- For metal working. Ø 150 mm.
- 10 pieces per package**

Grain 80			
9033-180/10	161	-	139330
Grain 100			
9033-1100/10	133	-	139347
Grain 120			
9033-1120/10	139	-	139354
Grain 150			
9033-1150/10	123	-	139361

Belt Sander



For narrow surfaces (belt width 10 mm)

Three abrasive belts included 330 x 10 mm (grain size 80, 100, 120)

- Continuous speed regulation
- Locking device for quick belt changing
- Automatic belt adjustment
- 360° head rotation
- Belt speed: 1188 m/min
- Air consumption: 240 l/min
- Air inlet thread: 6.3 mm (1/4")
- Working pressure: 6.3 bar
- Sound pressure level: Lp A 73 dB(A)
- Coupler plug, nominal size 7.2 included

HAZET No.	g	1/min	EAN-No. 4000896+
9033-4	1117	18000	131815

Abrasive belts

- for Belt Sander 9033-4
- 330 x 10 mm, 10 pieces per package
- Grain 80**

9033-480/10	39	-	139101
Grain 100			
9033-4100/10	35	-	139118
Grain 120			
9033-4120/10	32	-	139125

Angle Grinder



- Lateral handle, to be used on left or right side
- Quick adjustment (without tools) of protection cover
- For grinding discs up to a thickness of 0.8–6 mm
- Spindle thread M14 x 2
- **For grinding discs 125 x 22 mm**
- Spindle locking
- Air consumption: 113 l/min
- Air inlet thread: 6.3 mm (1/4")
- Working pressure: 6.3 bar
- Sound pressure level: Lp A 89 dB(A)
- Coupler plug, nominal size 7.2 included

HAZET No.	g	1/min	EAN-No. 4000896+
9033-7	2342	10000	132386





Ingenuous Tools

Pneumatic Tools/Machinery

Angle Grinder




- For working areas with restricted access, suitable for cutting metal sheet and steel
- Including cut-off wheels 100 x 0.8 x 9.53 (3/8") mm
- For cut-off wheels up to 100 x 1.0 x 10 mm
- Air consumption: 113 l/min
- Air inlet thread: 6.3 mm (1/4")
- Low height for working areas with restricted access
- Reduced vibrations
- Cold-insulated handle
- Working pressure: 6.2 bar
- Sound pressure level: Lp A 102.3 dB(A)
- Coupler plug, nominal size 7.2 included
- Quick adjustment (without tools) of protection cover with pressure key

HAZET No.	Weight g	Length mm	1/min	EAN-No. 4000896+
9033-8	1800	400	16000	143771

- 5 Cut-off wheels 100 x 0.8 x 9.53 (3/8") mm
- Suitable for HAZET Angle Grinder 9033-8
- For cutting thin-walled metal sheet and steel
- According to European standard 12413 and OSA directives

9033-08/5	118	-	-	144310
-----------	-----	---	---	--------

Mini Orbital Sander Set, 6 pieces

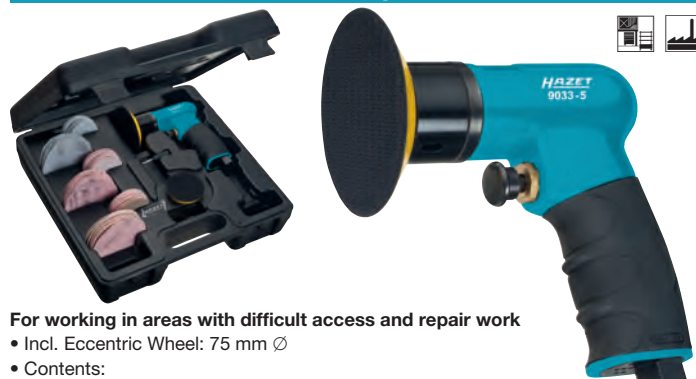

For working in areas with difficult access and repair work

- Incl. Eccentric Wheel: 75 mm Ø
- Contents:
 - 1 Orbital Sander
 - 2 Grinding discs 50 mm (2") and 76.2 mm (3")
 - Abrasive pads, 10 pieces each grain size: 320, 400 and 600
 - 1 Adjusting wrench
- With hook and loop back
- hose diameter: 10 mm
- Air consumption: 113 l/min
- Air inlet thread: 6.3 mm (1/4")
- Working pressure: 6.2 bar
- Sound pressure level: Lp A 81 dB(A)
- Coupler plug, nominal size 7.2 included



HAZET No.	Weight g	Length mm	1/min	EAN-No. 4000896+
9033-5	1448	117	15000	158775

10 replacement abrasive pads, grain size: 320, diameter: 50 mm				
9033-5-01/10	-	-	-	160525
10 replacement abrasive pads, grain size: 400, diameter: 50 mm				
9033-5-02/10	-	-	-	160730
10 replacement abrasive pads, grain size: 600, diameter: 50 mm				
9033-5-03/10	-	-	-	160747

Mini Orbital Sander Set, 6 pieces



HAZET No.	Weight g	Length mm	1/min	EAN-No. 4000896+
10 replacement abrasive pads, grain size: 320, diameter: 75 mm				
9033-5-04/10	-	-	-	160754
10 replacement abrasive pads, grain size: 400, diameter: 75 mm				
9033-5-05/10	-	-	-	160761
10 replacement abrasive pads, grain size: 600, diameter: 75 mm				
9033-5-06/10	-	-	-	160778

Multi Sander Set, 17 pieces



For removal of underseal, sealing compound, rust, corrosion, paint, plastic film, labels as well as for paint stripping.

- Contents:
- Multi Sander,
 - 2 Erasers,
 - 1 Adapter for eraser,
 - 1 Wire brush 23 mm Ø, coarse and bent,
 - 1 Wire brush 11 mm Ø, coarse and bent, (for underseal and sealing compound as well as for paint stripping, with coarse sand-blasting effect),
 - 1 Wire brush 11 mm Ø, fine and straight,
 - 1 Wire brush 23 mm Ø, fine and straight, (for paint and rust, without sand-blasting effect),
 - 6 Strip Wheels,
 - 1 Adapter for 11 mm Ø wire brushes,
 - 1 Adapter for single strip wheel,
 - 1 Adapter for double strip wheel
 - Air consumption: 113 l/min
 - Air inlet thread: 6.3 mm (1/4")
 - Working pressure: 6.2 bar
 - Sound pressure level: Lp A 88 dB(A)
 - Coupler plug, nominal size 7.2 included
 - Length: 318 mm

HAZET No.	Weight g	Length mm	1/min	EAN-No. 4000896+
9033-6	4674	318	3500	158577

5 pieces foil eraser (lighter version)				
9033-6-01/5	-	-	-	160167
5 pieces foil eraser (darker version)				
9033-6-01 A/5	1280	-	-	160228
5 wire brushes 23 mm wide, coarse, bent tips. For the removal of underseal, sealing compound as well as for paint stripping with coarse sand-blasting effect				
9033-6-02/5	-	-	-	160174
5 wire brushes 11 mm wide, coarse, bent tips. For the removal of underseal, sealing compound as well as for paint stripping with coarse sand-blasting effect				
9033-6-03/5	-	-	-	160181
5 strip wheels				
9033-6-04/5	-	-	-	160198
5 wire brushes 11 mm wide, fine, straight tips. For the removal of paint and rust, without sand-blasting effect				
9033-6-05/5	120	-	-	160204
5 wire brushes 23 mm wide, fine, straight tips. For the removal of paint and rust, without sand-blasting effect				
9033-6-06/5	260	-	-	160211



Mini Polisher Set, 6 pieces



- For working in areas with difficult access and repair work
- Incl. Polishing Wheel: 75 mm Ø
- Contents:
 - 1 Polisher
 - 1 Wet grinding pad
 - 1 Plastic pad soft (yellow)
 - 1 Plastic pad hard (white)
 - 1 Lambskin
 - 1 Adjusting Wrench
- With hook and loop back
- Air consumption: 113 l/min
- Air inlet thread: 6.3 mm (1/4")
- hose diameter: 10 mm
- Working pressure: 6.2 bar
- Sound pressure level: Lp A 81 dB(A)
- Coupler plug, nominal size 7.2 included



HAZET No.	⚖ g	l mm	1/min	EAN-No. 4000896+
9033-9	1960	130	2500	158768
5 plastic pads yellow				
9033-9-02/5	-	-	-	160556
5 plastic pads white				
9033-9-03/5	-	-	-	160563
5 lambskins				
9033-9-04/5	80	-	-	160570

Sabre Saw



- For one-hand operation
- Adjustable support frame, suitable for double-walled sheet steel
- Suitable for cutting small radii
- Cutting capacity: sheet steel 2.9 mm / aluminium 3.2 mm
- 3 saw blades included (total length: 70 mm)
- Joint protects the air hose from kinking
- Free speed: 9,500 strokes/min
- Air consumption: 170 l/min
- Air inlet thread: 6.3 mm (1/4")
- Sound pressure level: Lp A 90 dB(A)
- Working pressure: 6.3 bar
- Coupler plug, nominal size 7.2 included

HAZET No.	⚖ g	l mm	EAN-No. 4000896+
9034-1	754	215	132362

- Saw blades**
for Sabre Saw 9034-1
- 5 pieces per package
 - 75 mm total length
 - Tool holder 1 x 13 mm

18 teeth			
9034-018/5	16	-	139392
24 teeth			
9034-024/5	16	-	139408
32 teeth			
9034-032/5	16	-	139415

Needle Scaler



- Pistol shape
- Adjustable needle cover enables maximum utilisation of needles
- Two-piece housing design for easy maintenance
- 19 needles Ø 3 mm
- 3,200 impacts/ min
- Cold-insulated handle
- Air consumption: 170 l/min
- Air inlet thread: 6.3 mm (1/4")
- Working pressure: 6.3 bar
- Sound pressure level: Lp A 97 dB(A)
- Dimensions: 330 x 45 x 205 mm
- Coupler plug, nominal size 7.2 included


HAZET No.	⚖ g	l mm	EAN-No. 4000896+
9035-5	3035	330	132355

- Spare needles**
for Needle Scaler 9035-5
19 needles, Ø 3 mm

9035-050	202	-	139385
----------	-----	---	--------

Chisel Hammer Set



- For detaching car body sheets with compressed air and for industrial application
- Also suitable for loosening rusted screws
- Power control with push-button
- 5 x  175 mm long
- Approx. 60% reduced vibrations compared to standard models
- 6 pieces, in plastic box
- 3000 impacts/min
- Chisel insert: Ø 10 mm
- Air consumption: 240 l/min
- Air inlet thread: 6.3 mm (1/4")
- Working pressure: 6.3 bar
- Sound pressure level: Lp A 98 dB(A)
- Cold-insulated handle
- Coupler plug, nominal size 7.2 included


HAZET No.	⚖ g	EAN-No. 4000896+
9035/6	3247	109463



Pneumatic Chisel Hammer Set



For detaching car body sheets with compressed air and for industrial application

- Also suitable for loosening rusted screws
- Power control with push-button
- 5 x  175 mm long
- Approx. 60% reduced vibrations compared to standard models
- Very low air consumption: only 77.3 l/min
- 2900 impacts/min
- Chisel insert: \varnothing 10 mm
- Air inlet thread: 6.3 mm (1/4")
- Working pressure: 6.3 bar
- Sound pressure level: Lp A 104.9 dB(A)
- Coupler plug, nominal size 7.2 included
- **6 pieces, in plastic box**

HAZET No.	$\frac{\Delta}{g}$	l	1/min	EAN-No. 4000896+
9035-1/6	4593	146765		

Air Nibbler



Ideal for cutting small radii (min. 7 mm)

- Also suitable for cutting plastic
- Continuous speed regulation
- Cutting capacity: steel 1.2 mm/aluminium 1.6 mm
- Twin bearing spindle reducing vibrations
- Cold-insulated handle
- Air consumption: 85 l/min
- Working pressure: 6.3 bar
- Sound pressure level: Lp A 82 dB(A)
- Cutting width: 4.5 mm
- Coupler plug, nominal size 7.2 included

HAZET No.	$\frac{\Delta}{g}$	l	1/min	EAN-No. 4000896+
9036-1	1171	190	2600	131822

Spare parts set for 9036-1 (punch, template, nut and screw incl.)

9036-01/5	60	-	-	157792
-----------	----	---	---	--------

Air Shear



With heavy-duty cutting blade for maximum cutting capacity: steel 1.2 mm/aluminium 1.6 mm

- Also appropriate for contour cuts
- Change of cutting speed with push-button
- Twin bearing spindle reducing vibrations
- Cold-insulated housing
- Air consumption: 113 l/min
- Working pressure: 6.3 bar
- Sound pressure level: 82 dB(A)
- Cutting width: 4.5 mm
- Coupler plug, nominal size 7.2 included

HAZET No.	$\frac{\Delta}{g}$	l	EAN-No. 4000896+
9036-5	1234	220	132331

Spare parts set for 9036-5 (upper and lower cutter incl. spacer plate and screw)

9036-05/9	180	-	142569
-----------	-----	---	--------

Blind Rivet Gun



Pneumatic / hydraulic with integrated mandrel collection system

- Professional riveting, suitable for continuous operation with rivets made of steel, stainless steel, aluminium and copper
- Possible rivet sizes: 3 – 3.2 – 4.0 – 4.8mm
- 3 nose pieces
- Lightweight and shock resistant plastic housing
- Air consumption: 2 l/stroke
- Working pressure: 6.3 bar
- Sound pressure level: 75 dB(A)
- Tractive power: 10,700 N
- Coupler plug, nominal size 7.2 included

HAZET No.	$\frac{\Delta}{g}$	l	EAN-No. 4000896+
9037-1	2770	290	150175

Blind Rivet Gun




Pneumatic/ hydraulic Professional riveting, suitable for continuous operation with rivets made of steel, stainless steel, aluminium and copper up to 6.4 mm

- Possible rivet sizes: 2.4 – 3.2 – 4.0 – 4.8 – 5 and 6.4 mm
- 6 nose pieces (one nose piece 4.8 mm pre-installed)
- Coupler plug with swivel joint
- Total stroke: 19 mm
- High tractive power: 13847 N
- Low sound pressure level: Lp A 73.3 dB(A)
- **With sturdy metal housing**
- Air consumption: 1.8 l/stroke
- Air inlet thread: 6.3 mm (1/4")
- Working pressure: 6.3 bar
- Coupler plug, nominal size 7.2 included – with swivel joint for flexible operation


HAZET No.	g	l mm	EAN-No. 4000896+
9037-2	2640	260	153466

Air Blow Gun

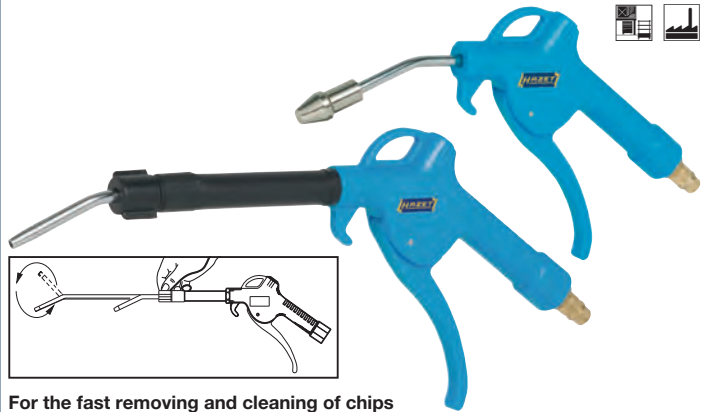

For the fast removing and cleaning of chips and other kinds of foreign substances.

- To be used in workshops, wood working, decor, housework and on machinery, especially in areas with restricted access.
- With non-slip handle
- Body material: nylon, nozzle material: steel
- Maximum pressure: 220 PSI/ 15 bar
- Working pressure: 75 up to 120 PSI, 5 up to 8 bar
- Max. air flow: 300 l/min
- Sound pressure level: 85 up to 90 dB/A
- Air inlet thread: 6.3 mm (1/4")
- Coupler plug, nominal size 7.2 included



HAZET No.	g	EAN-No. 4000896+
Standard execution nozzle length: 93 mm, total length: 205 mm 9040-1	216	109487
Nozzle length continuously adjustable from 165 to 280 mm 9040-2	235	109494

Protective Shield for Air Blow Gun



- For Air Blow Gun 9040-2 or guns with equal nozzle diameter (6 mm)
- Shield diameter: 100 mm
- Perfect protection of the user against splattering liquids or particles

HAZET No.	g	EAN-No. 4000896+
9040-20	50	161119

Pocket Blow Pen



Practical and compact design with clip for fixation e.g. in pockets

- Turn to adjust air flow
- Air nozzle Ø 3 mm
- Easy handling, clicks directly on air coupling 7.2 mm
- Inlet pressure: 12 bar
- Max. airflow at 6 bar: 360 l/min
- High-quality Perbunan seal (NBR)
- Duraluminium housing
- Coupler plug, nominal size 7.2 included



HAZET No.	g	l mm	EAN-No. 4000896+
9040-3	37	109	109500


Pneumatic/ hydraulic For pop rivets

- Possible rivet sizes: 2.4 – 3.0 – 3.2 – 4.0 – 4.8 mm
- 4 nose pieces
- With sturdy metal housing
- Air consumption: 1 l/stroke
- Working pressure: 6.3 bar
- Sound pressure level: Lp A 85 dB(A)
- Tractive power: 8700 N
- Coupler plug, nominal size 7.2 included – with swivel joint for flexible operation

HAZET No.	g	l mm	EAN-No. 4000896+
9037 SPC	1840	270	150168



Pocket Blow Pen

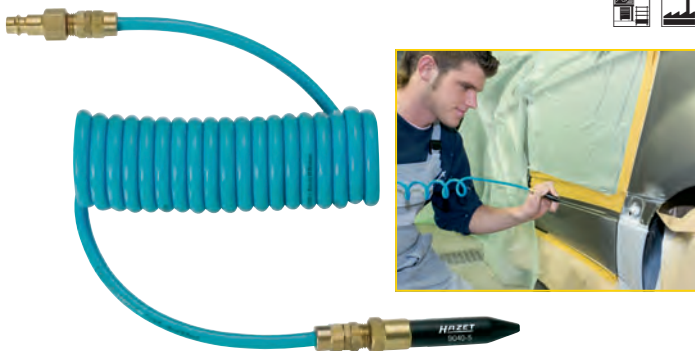

Type of hose: Spiral hose

- Easy handling: The air flow starts when slightly folding the nozzle
- Rubber-coated air blow gun without hard tips and housing protects sensitive objects during repair work, e.g. lacquered areas in the engine compartment or similar
- Easy handling: Clicks directly on air hose coupling
- Max. working length: 3 m
- Working pressure: 6.3 bar
- Coupler plug, nominal size 7.2 included

HAZET No.	g	l mm	EAN-No. 4000896+
9040-5	412	80	146987

Spiral Hose



- Polyurethan
- Air connection: 6.3 mm (1/4")
- Length: 7.62 m
- Connecting pieces with 360° swivel joints
- Burst pressure according to DIN: 55.1 bar/800 PSI
- Working pressure: 10 bar

HAZET No.	g	EAN-No. 4000896+
9040-7	630	153404

Air Hose Reel



High-quality, closed special plastic case, supplied with rotating metal mounting bracket made for convenient installation at the workplace.

- Suitable for compressed air or cold water
- Automatic stop: every 50 cm (can be switched off)
- Max. working pressure: 15 bar
- Permissible temperature range: -5° / +40° C
- Connection thread: 10 mm (3/8")
- Dimensions (packed): 500 x 450 x 255 mm
- Borehole spacing of the mounting bracket: 160 mm
- Black polyurethane hose with a \varnothing 10 mm (3/8")
- Hose length: 15 + 1 m
- Length of connection hose: 1.5 m

HAZET No.	g	EAN-No. 4000896+
9040-10	8000	177479

Tire Inflator




Special rubber housing protects manometer against light impacts

- Handle with operating lever and discharge knob (for one-hand use)
- Tube with plug-in nipple
- Max. pressure: 8 bar
- Handle with integrated suspension hook
- Measuring range (manometer): 0–12 bar
- Flexible tube, length: 400 mm
- Manometer diameter: 63 mm
- Air inlet thread: 6.3 mm (1/4")
- Working pressure (recommended): 6.3 bar
- Coupler plug, nominal size 7.2 included

HAZET No.	g	EAN-No. 4000896+
9041-1	411	147076

Tire Inflator, calibrated

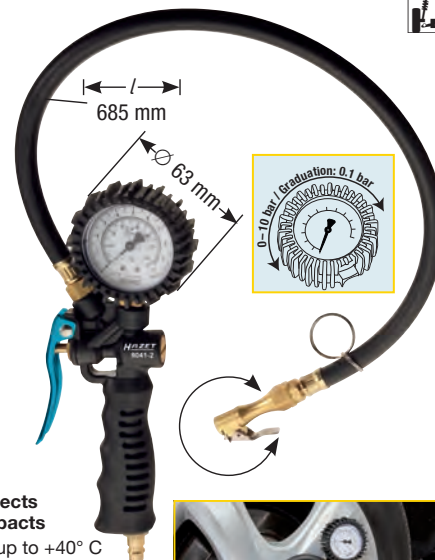


Special rubber housing protects manometer against light impacts

- Temperature range: -10° C up to +40° C
- Handle with operating lever for filling and deflating (for one-hand use)
- Tube with plug-in nipple, pivoting through 360°
- Measuring range (manometer) (calibrated): 0-10 bar
- Scale graduation: 0.1 bar
- Flexible tube
- Manometer housing: 63 mm \varnothing
- Air inlet thread: 6.3 mm (1/4")
- Length: 685 mm (with coupling)
- Coupler plug, nominal size 7.2 included

HAZET No.	g	EAN-No. 4000896+
9041-2	751	161928

Tire Inflator, calibrated

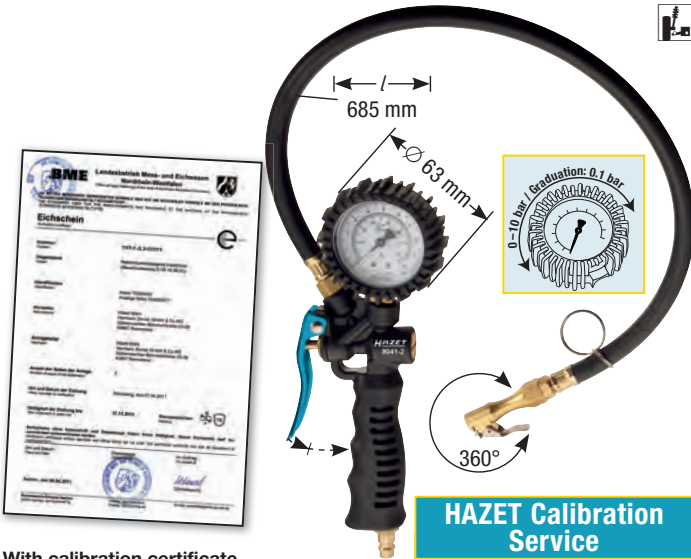

- With calibration certificate**
Special rubber housing protects manometer against light impacts
- Calibration certificate according to German calibration regulations
 - Measuring range (manometer) (calibrated): 0–10 bar
 - Temperature range: -10° C up to +40° C
 - Coupler plug, nominal size 7.2 included
 - Weight: 565 g
 - Handle with operating lever for filling and deflating (for one-hand use)
 - Tube with plug-in nipple, pivoting through 360°
 - Scale graduation: 0.1 bar
 - Air inlet thread: 6.3 mm (1/4")
 - Flexible tube
 - Manometer housing diameter: 63 mm
 - Length: 685 mm (with coupling)



HAZET No.	Δg	EAN-No. 4000896+
9041-2 CERT	730	167760

Grease Gun



- Grease Gun adjustable to 360° with continuous pumping of grease and bleeder valve**
- Continuous pumping of grease
 - 360° adjustable body
 - Gun-filling with grease cartridge, "loose" grease or via dispenser
 - Length metal tube: 172 mm
 - Length nylon hose: 230 mm
 - Working pressure: 6.3 bar
 - Filling capacity: 400 ml
 - Compaction: 40:1
 - Air consumption: 230 l/min.

HAZET No.	Δg	EAN-No. 4000896+
9042 N-1	1500	176472

Combination Spray Gun



- For underbody coating and noise protection or sealing of hollow spaces with wax**
- Can be used with all common cartridges of 1000 ml.
 - Effortless application of wax in hollow spaces, etc. due to flexible 500 mm hose with nozzle for spreading wax which is also supplied
 - Simple application of underbody coating (noise protection) with nozzle
 - Application recommendation: Open cartridge, insert suction tube, tighten cartridge. Ready for use!
 - Air consumption: 225 l/min
 - Air inlet thread: 6.3 mm (1/4")
 - Working pressure: 6.3 bar
 - Weight (without cartridge): 410 g
 - Coupler plug, nominal size 7.2 included

HAZET No.	Δg	EAN-No. 4000896+
9042-4	553	147090

Air Blow and Suction Gun



- Suitable for sucking up dust particles off surfaces into the collection bag as well as for blowing surfaces clean**
- Metal housing
 - Working pressure: 6.3 bar
 - Acceleration of vibration: 0.4 m/s²
 - Coupler plug, nominal size 7.2 mm included
 - Air consumption: 96 l/min
 - Air inlet thread: 6.3 mm (1/4")
 - Sound pressure level: Lp A 92 dB(A)
 - Sound power level: Lp W 97 dB (A)
 - Recommended hose diameter: 10 mm

HAZET No.	l mm	Δg	EAN-No. 4000896+
9043-10	145	670	170586

Pneumatic Tools / Machinery



Pneumatic Tools/Machinery

Mini Oiler



For oiling pneumatic tools automatically

- Refillable, filling capacity 28 ml
- Compact design – to be fixed directly to the tool
- Air inlet thread: 6.3 mm (1/4") – suitable for nearly all air tools
- Extension of the service life of your pneumatic tools

HAZET No.	g	EAN-No. 4000896+
Mini-Oiler for pneumatic tools 9070-1	106	129188

Maintenance Unit



Consisting of filter-pressure reducer, lubricator and manometer

- Connection manometer: 3.2 mm (1/8")
- Max. pressure: 16 bar (1/2" and 3/8") 12 bar (1/4"), max. working pressure: 12 bar (1/2" and 3/8") 10 bar (1/4")
- Pressure indication: 0.5–12 bar
- Permissible temperature range: – 10 up to + 55 °C
- Filter grade: 10 µm
- Recommended lubricant: class F (Sprinter ADVP 22)

HAZET No.	g	EAN-No. 4000896+
• Connection: 12.5 mm (1/2") • Air flow at 6.3 bar: 5000 NI/min • Capacity filter-pressure reducer: 50 ml Capacity oil separator: 170 ml 9070-2	1380	153343
• Connection: 10 mm (3/8") • Air flow at 6.3 bar: 5000 NI/min • Capacity filter-pressure reducer: 50 ml Capacity oil separator: 170 ml 9070-3	1420	153350
• Connection: 6.3 mm (1/4") • Air flow at 6.3 bar: 1800 NI/min • Capacity filter-pressure reducer: 30 ml Capacity oil separator: 40 ml 9070-4	580	153367

Filter-Pressure Reducer



Filter-Pressure Reducer

Consisting of filter-pressure reducer and manometer

- Connection manometer: 3.2 mm (1/8")
- Max. pressure: 16 bar (1/2" and 3/8") 12 bar (1/4"), max. working pressure: 12 bar (1/2" and 3/8") 10 bar (1/4")
- Pressure indication: 0.5–12 bar
- Permissible temperature range: -10 up to + 55°C
- Filter grade: 10 µm
- Capacity filter-pressure reducer: 50 ml

HAZET No.	g	EAN-No. 4000896+
• Connection: 12.5 mm (1/2") • Air flow at 6.3 bar: 5000 NI/min 9070-5	890	153374
• Connection: 10 mm (3/8") • Air flow at 6.3 bar: 5000 NI/min 9070-6	930	153381
• Connection: 6.3 mm (1/4") • Air flow at 6.3 bar: 1800 NI/min 9070-7	380	153398

Magnetic Holder



- With two strong magnets to hold one impact wrench and four sockets

HAZET No.	g	EAN-No. 4000896+
9070-10	1510	158157

Swivel Joint



Optimal working due to swivel motion in any direction

- Allows perfect spraying results even in areas with restricted access
Nothing could be more flexible!
- Coupler plug, nominal size 7.2 included
- Air inlet thread: 6.3 mm (1/4")

Made in Germany

HAZET No.	g	EAN-No. 4000896+
9070-30	115	156382



NEW GENERATION!

NEW DESIGN.



9012-1 SPC

9011 MG

9012 SPC

9012 MG

9013 SPC

9013 MG

9012 UL

9012 EL

9014 MG-Lg

9014 MG



Machinery



Cordless Impact Wrench Set



12.5 1/2"



18 V, 3 Ah

- **Max. loosening torque: 525 Nm**
- With shift button right/left
- Contents: Cordless Impact Wrench, Li-Ion battery, battery charger
- In plastic case
- ■ 12.5 = 1/2"
- Recommended torque: 500 Nm
- Max. torque 540 Nm
- Rotation speed 0-1650 rpm
- Forward/ reverse
- Li-Ion battery with very low self-discharge (only 2%) compared to a standard NiMH battery (15-25%)
- Battery charger (with 2 charging slots) compatible to battery 9240-1
- Spare rechargeable battery 9212 N-01

Do you know – Li-Ion batteries:

- do not have any memory effect
- consist of cells each with 3.6 V
- after full charge they have a higher voltage than 3.6 V i.e. 5 cells each 3.6 V = 18 V – BUT after full charge a peak voltage of up to 20 V is possible
- Attention: For a longer lifetime of the battery please store it charged up to 50 to 80% only
- have an energy density which is twice as high as for example nickel cadmium batteries
- have a nominal voltage three times higher than a nickel metal hydride battery

HAZET No.	Nm max.	Δ± g	EAN-No. 4000896+
9212 N-1	540	4640	160327
Like 9212 N-1 + additional battery pack			
9212N-1/4	-	5255	164981
Replacement battery			
9212 N-01	-	690	160334
Battery charger			
9212 N-02	-	760	160624
Replacement carbon brushes (2 pairs)			
9212 N-03/2	-	-	160617

Hot-Air Tool



Hot-Air Tool

Standard execution – excellent price-quality-ratio

- Power: **1600 Watts**
- 2 temperature ranges 350/500 °C
- 2 air flow ranges: 350/500 l/min
- Exhaust air will not be deflected through the motor
- Δ± 680 g
- Ergonomical design – even distribution of weights – may stand upright
- Complete set with stainless steel wide slot nozzle and reflector nozzle, in plastic case

HAZET No.

EAN-No. 4000896+

1990-1/3

141531



High-quality execution for professionals, with many additional functions

- Power: **2000 Watts**
- Temperature range: **80-650 °C electronically-controlled and continuously adjustable**
- Air flow range: **200-550 l/min electronically-controlled and continuously adjustable**
- Menu navigation in 8 languages (D, ES, FR, GB, IT, NL, PT, SE)
- Complete set, including stainless steel welding nozzle, overlap welding nozzle, solder sleeve reflector nozzle, reflector nozzle and pressure roller, in plastic case
- Δ± 780 g
- 7 preset programmes for welding of plastic material (select the desired programme – temperature and air flow will be set automatically)
- Adjusting of the current temperature through closed electronically-controlled system, using different nozzles
- Stand-by mode (low power consumption at constant temperature)
- Exhaust air will not be deflected through the motor
- 14 preset programmes
- Ergonomical design – even distribution of weights – may stand upright
- Protected heating element ensuring optimal isolation
- LCD-display

HAZET No.

EAN-No. 4000896+

1990-2/6

141586